

Securing wells for more than 90 years.




**DOUBLE E**

a Parco company

# Specification Sheet

## Sucker Rod Stripper

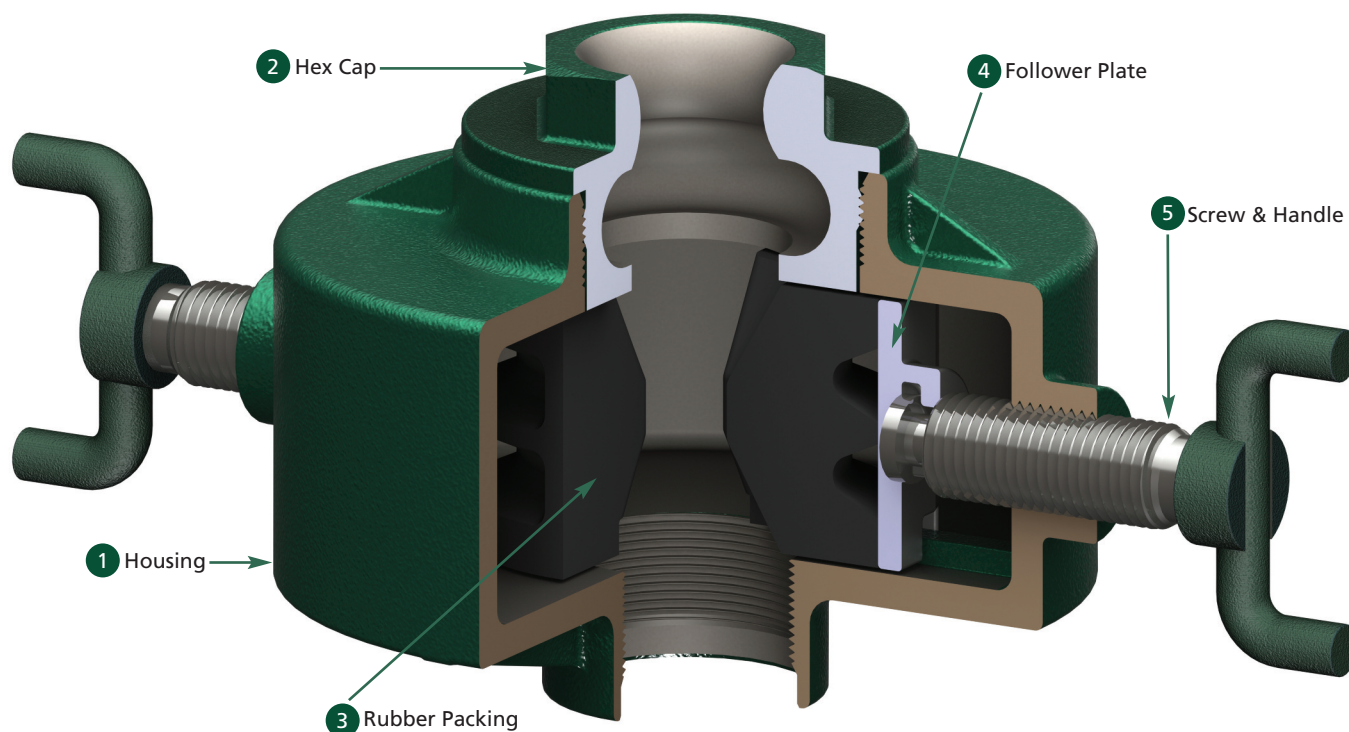

### Key Features

- Removes oil and paraffin from virtually any size rod or piping.
- Easy open cap for quick rubber changes.
- Available with rod table to store tools during well maintenance.

\*Double E has numerous Sucker Rod Stripper models available. Contact a Double E representative for your specific requirements. If we don't have a Sucker Rod Stripper model for your application, we can develop one for you.


### Sucker Rod Stripper with Rod Table



### Popular Sucker Rod Strippers

Sucker Rod Type	Height (in.)	Minimum Bore (in.)	Thread Size (in.)	Model Number	Weight (lbs.)
Standard	9-1/2	2-9/16	3-1/2 (OD) LP	02-04000	63
With Rod Table	9	2-9/16	3-1/2 (OD) LP	02-05000	83

# Replacement Parts for Sucker Rod Stripper with and without Rod Table

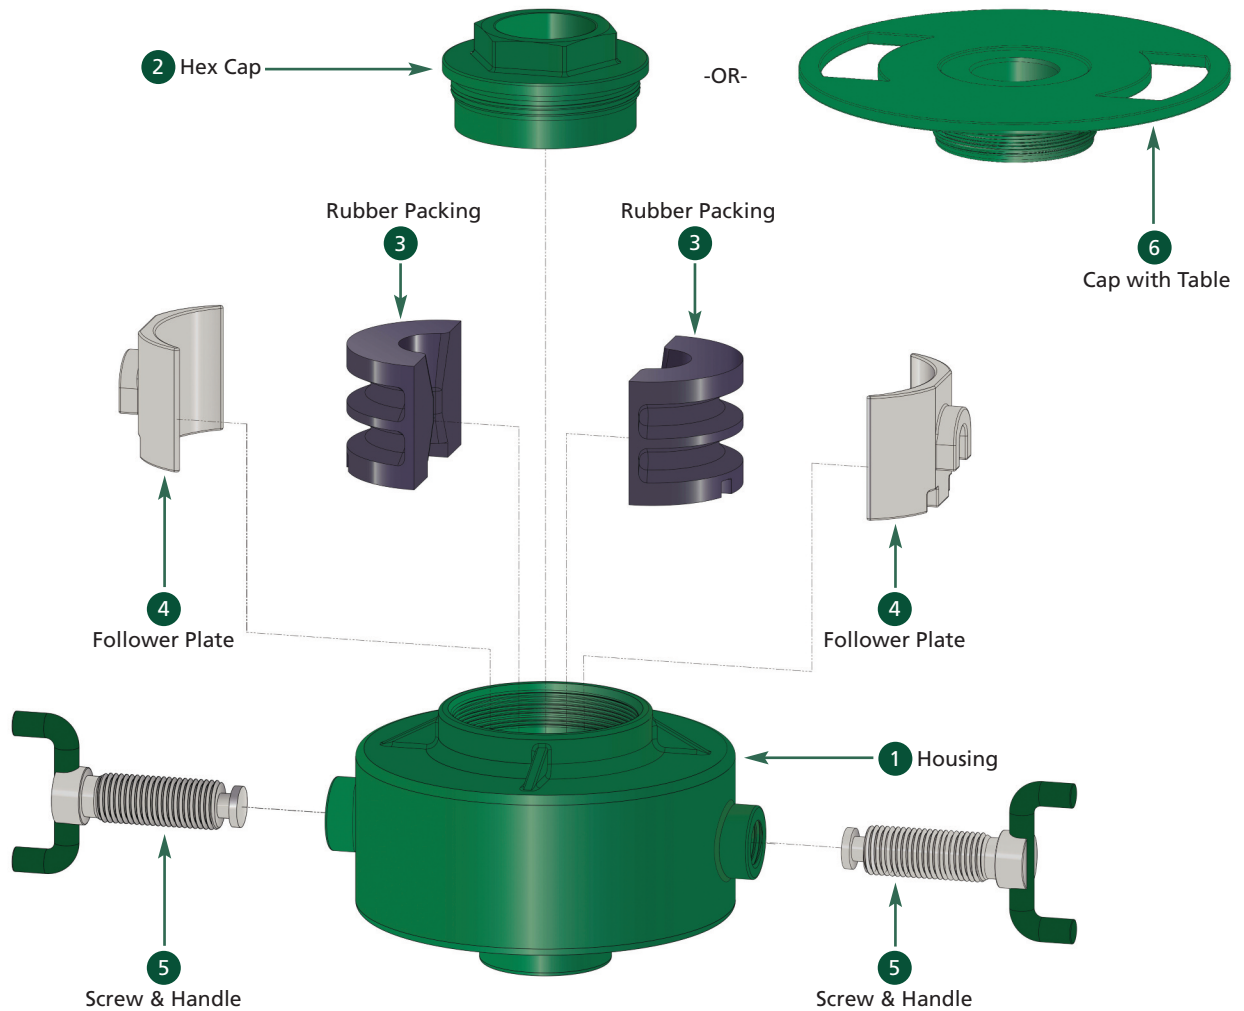

NOT A PRESSURE CONTAINING DEVICE

## Sucker Rod Stripper Main Components

Item	Description	Qty.	Part Number
1	Housing	1	02-07500
2	Hex Cap	1	02-08500
3	Rubber Packing	2	02-01000
4	Follower Plate	2	02-07525
5	Screw & Handle	2	02-07530
6	Cap with Table	1	02-05002

## Key Rubber Properties

Temperature Range	Rubber Material
-40 to 180°F	45-Duro Natsyn

This brochure is intended as a guideline and reference. Appropriate testing and validation by users having technical expertise is necessary for proper use of Double E products.



Double E, Inc., 1261 Profit Drive, Dallas, Texas 75247  
214-631-2290 Fax 214-630-4712 [www.doubleeinc.com](http://www.doubleeinc.com)