

Securing wells for more than 80 years.™



DOUBLE E

Sucker Rod Strippers

Want a Cleaner Work Environment?

Double E's adjustable Sucker Rod Strippers remove oil and paraffin from virtually any size rod or piping as they are being pulled. That stripping action provides a clean and safe work environment which saves time and money during lifting operations. Double E stocks two popular versions of its Sucker Rod Strippers (see Figure 1). If we don't have a Sucker Rod Stripper model for your application, we can develop one for you.

Stocked Sucker Rod Strippers

1. Standard Sucker Rod Stripper

Double E's standard Sucker Rod Stripper is made of durable ductile iron. At 58 pounds, its 9-1/2 inch high body has a minimum bore of 2-9/16 inches and an outside diameter thread size of 3-1/2 inches. Adapters are available for alternate thread sizes.


2. Sucker Rod Stripper with Rod Table

Double E also offers a modified version of its popular Sucker Rod Stripper. The modified version comes with a pre-installed rod table. That rod table reduces downtime and maintenance costs by providing a convenient location to store tools during well maintenance.

Rely on Double E

Double E is a leading manufacturer of high-performance oil well production tools. We specialize in Blow Out Preventers, Oil Savers, Stuffing Boxes, Sucker Rod Strippers, and Rod Guides. Double E also makes custom-molded elastomeric products, including rubber-to-metal bonded parts. Founded in 1923, Double E was one of the first manufacturers of metal products to focus on the oil and gas industry. Our 30,000 square-foot facility is located in Dallas, Texas.

Figure 1:

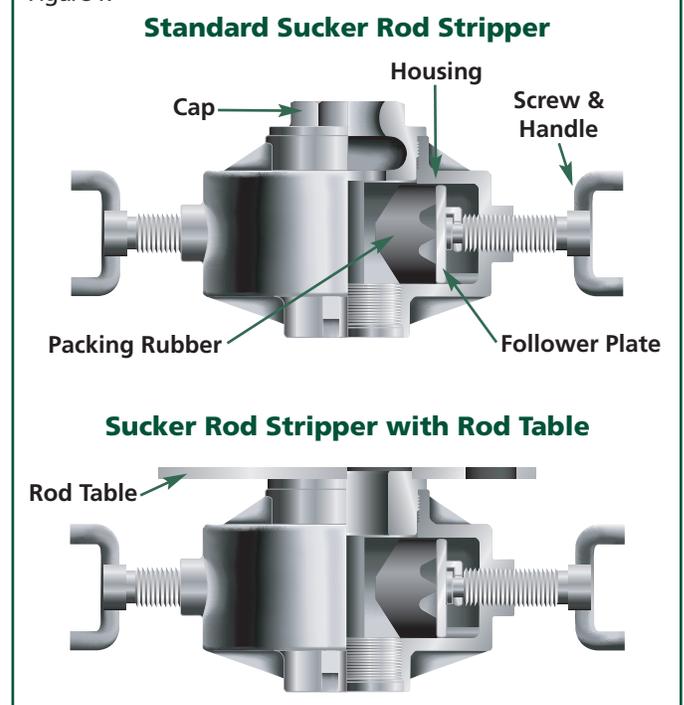

Double E Sucker Rod Strippers Meet Your Needs

1. Provide a Cleaner, Safer Work Environment

Regular use of Double E Sucker Rod Strippers will provide you with a cleaner, safer work environment. By stripping oil and paraffin from virtually any size rod or piping, our Sucker Rod Strippers will reduce accidents at your well site.

2. Huge Inventory

We stock 2 popular sizes of Sucker Rod Strippers. In addition to our standard version, Double E stocks a modified Sucker Rod Stripper with a pre-installed rod table. We also stock replacement rubber packings which can be used with both versions (see Figure 2). Using our web site, you can view our inventory of Sucker Rod Strippers and replacement rubber packings 24 hours a day.



Order Online

To place your order online, visit our website at www.doubleeinc.com. You can also place orders by phone at 214-631-2290 or by fax at 214-630-4712.

If we receive your order by 2:30 p.m. central time, you can receive your parts as soon as the next business day.

Type	Weight (lbs.)	Height (in.)	Minimum Bore (in.)	Thread Size (in.)
Standard	58	9-1/2	2-9/16	3-1/2 (OD) LP
With Rod Table	77	9	2-9/16	3-1/2 (OD) LP

△ This brochure is intended as a guideline and reference. Appropriate testing and validation by users having technical expertise is necessary for proper use of Double E products.



Double E, Inc., 1261 Profit Drive, Dallas, Texas 75247
214-631-2290 Fax 214-630-4712 doubleeinc.com